

NPPT-C1D

Single input, single output

NPPT-C11D


Single input, dual output

Input: 0 ~ 10 k

Output: 4 ~ 20 mA

This potentiometer transmitter converts the 3-wire potentiometer signals to current signals. It needs an independent power supply. The input, output, and


using PC or a handheld programmer.

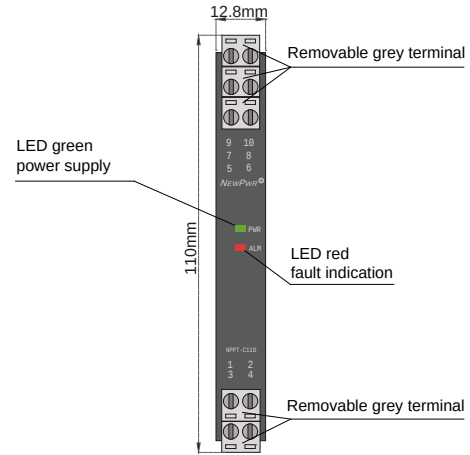

Parameters

Power supply:	18 V DC ~ 60 V DC (Reverse power protection)
Power dissipation:	0.8 W (single output) 1.2 W (double output)
Input signal:	
Output signal:	4 ~ 20 mA
Load resistance:	R_L
Accuracy:	0.1% F.S.
Temperature drift:	30 ppm/°C
Response time:	
Electromagnetic compatibility:	IEC 61326-3-1
Dielectric strength:	
Insulation resistance:	
Operation temperature:	-20 °C ~ +60 °C
Storage temperature:	-40 °C ~ +80 °C
Dimension:	12.8 mm (W) × 110 mm (H) × 117 mm (D)
Output states:	Whatever input fault status (except breakage), the output follows the input within measuring range. And the maximum value would not exceed the 110% of the upper limit of the measuring range (e.g. When the output signal type is 0 ~ 20 mA, the minimum output value may be 0 mA, the maximum output value would not exceed 22 mA).

Wiring diagram

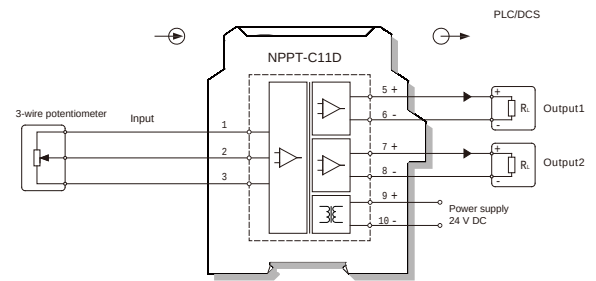

Model rules

NPPT-C ☒ ☒ D ☒

PB BUS powered
Default: Terminals powered
The second output signal^{note1}
Default: null
The first output signal^{note1}

note1 output signal

Number	Output signal
1	4 ~ 20 mA
3	0 ~ 10 mA
6	0 ~ 20 mA