


NPFSR-K131AMD

3X ÓY Y G3 SQSG 3XW
X3NO+1NC

K


1002

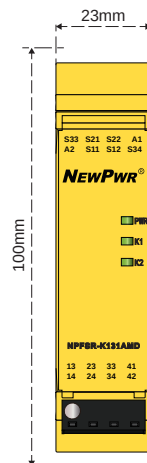

H v Q

h d y	24V AC/DC
d y k I	0.85 ~ 1.1
f l '	50Hz ~ 60Hz
Q i a	2.2W/24V DC, 5.4VA/24V AC
3 d l	50mA/24V DC
M i d	
3 t	PNP
e Q	3NO+1NC
e 1 3	
e a	AgSnO ₂
e k	AC-15: 5A/230V, DC-13: 5A/24V
e R w 3 i	10A gL/gG(NO), 6A gL/gG(NC)
T H	
Q H	
O u H	
d o ~ H A A	
d J k	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
h N i d y	250V AC
h ' ` a p d y	
N i A y	1500V AC, 1 min
d ↔ = k d "	IEC 60947-1
U	10Hz ~ 55Hz, 0.35mm
y v l	III
/ ... v l	2
i v l	IP20
t A □ y	-20°C ~ +60°C
ü è □ y	-40°C ~ +80°C
T ò y	
4 m u	10×10 ⁶

I ↑ g

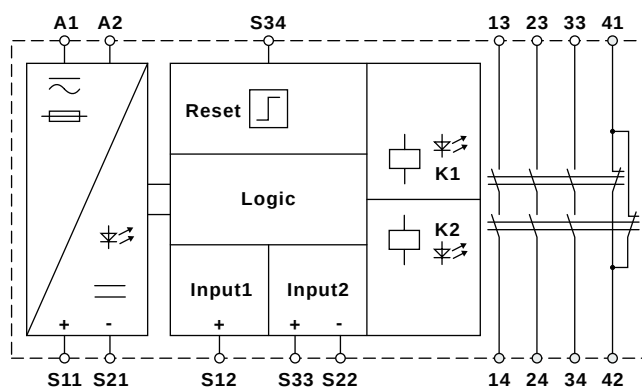

G 3 v Q

ó i v l	PLe, ISO 13849
G 3 l	Cat.4, ISO 13849
y n H	20, ISO 13849
W z A ~ '	99%, ISO 13849
W z u , Q H	164, ISO 13849
H u t , Q	68, ISO 13849
G 3 H Q ó v l	SIL3, IEC 61508
φ " G 3 H Q ó v l	SIL CL3, IEC 62061
. T Q y	1, IEC 62061
G 3 , Q " Q	, IEC 62061
ð H u , Q H '	1.29×10 ⁻⁵ /PTI=20 IEC 62061
½ ñ H u , Q H '	1.49×10 ⁻¹⁰ 1/h, IEC 62061
y B l	0, IEC 60204