
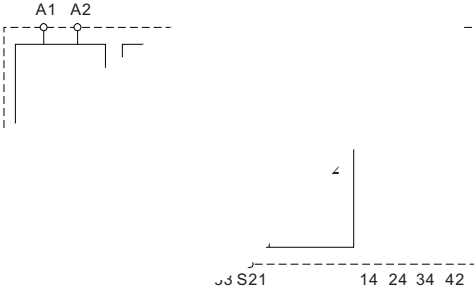


K	→ 简介		Ie = 1A 1 NO 7000000	
	K		B _{10d} 50%	
			→ 适用型号	
	■ (EN 574 Type III C)			
K	■ 0.5s			
	■			
	■ -			
		→ 技术参数		
		24V AC/DC		
		0.85~1.1		
		50Hz~60Hz		
		≤1.5 W/24V DC ≤4.8 VA/24V AC		
		≤50mA/24V DC		
		≤15Ω		
		(EN 574 Type III C)		
		3NO+1NC 2NO+2NC		
		AgSnO ₂ +0.2μmAu		
AC-15 5A/230V DC-13 5A/24V		10A gL/gG (NO) 6A gL/gG (NC)		
数		≤30ms		
		≤15ms		
		≤250ms		
		IEC/EN 60947 IEC 61326-3-1		
		IEC/EN 61000-6-2 IEC/EN 61000-6-4		
		250 V AC		
		6000V (1.2/50μs)		
		1500 V AC 1min		
		IEC 60947-1		
		10Hz~55Hz 0.35mm		
		III		
		→ 功能框图		
				
		NPFSR-K311D		
		NPFSR-K322D		
		→ 外形结构		
		× × : 23mm×100mm×115mm		

Nanjing New Power Electric Co., Ltd.

Nanjing New Power Electric Co., Ltd.


→ 应用示例

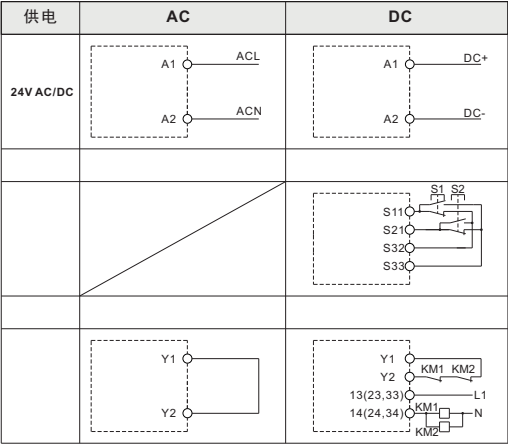

说明

- S1/S2 EN574 type IIIC
- KM1/KM2 IEC 60947

→ 功能描述

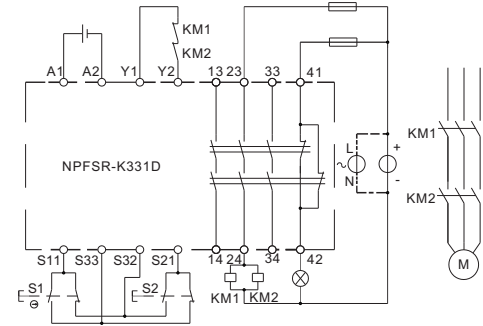

- “PWR”
- 0.5s S1 S2
- S1 S2


→ 安装

- DIN IEC 60715 35mm


-

A.


DIN




B.



C.



-

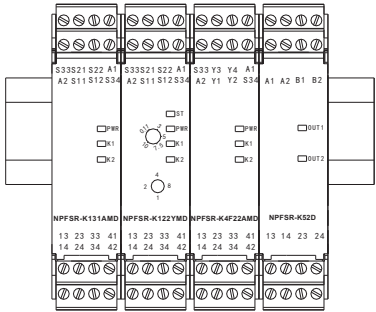

→ 面板显示

- PWR: ()
- K1: K1 () K1
- K2: K2 () K2

→ 注意事项

- IP20 ()

- IEC 60664-1 2

- IEC 61000-4

-

-

→ 补充说明

-