

C



()




: [Ex ia Ga] IIC [Ex ia Da] IIIC
: 12V DC ~ 30V DC
(1 2 4 5):
K E S B J T R N WRe3-WRe25
WRe5-WRe26
(7 8 10 11): 4 mA ~ 20 mA
: $R_t \leq [(U-12)/0.022] \Omega$ U
(25 °C ± 2 °C):

: 1 s
: 0.015 %F.S./°C
: ± 1 °C
: -20 °C ~ +60 °C
: EMC IEC 61326-3-1
WR *(1mA 1 Š ĝ , F

	4mA~20mA
NPEXA-C1D11L	■



/

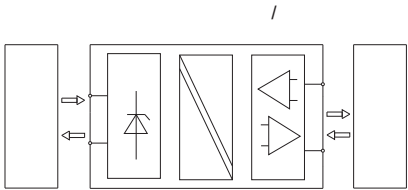

DIN IEC 60715 35mm



A

DIN

B

○